



CMCP422AT-C/IS Series

Intrinsically Safe Loop Powered 4-20 mA Acceleration Sensor,
Top Exit, 2-Pin MS 5015 Connector



Features

- Loop Powered 4-20 mA Output
- Acceleration Output with RMS or Peak Detection
- Top Exit with 2-Pin MS 5015
- Interfaces Directly with Control Systems (PLC/DCS)
- Selectable Full-Scale Ranges
- 10 Hz to 5.0 kHz +/-5% Frequency Response (600 CPM to 300 kCPM)
- Sealed to IP68
- European, USA and South African Approvals

Typical Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, HVAC, Spindles, Machine Tooling, Process Equipment and many more.

Technical Performance

Mounted Base Resonance:	10 kHz Min.
Ranges:	1, 2, 5 or 10 g; to specify see Ordering Information below
Frequency Response:	10 Hz to 5.0 kHz $\pm$ 5% 600 CPM to 300k CPM
Isolation:	Base Isolated
Measurement Range:	50 g peak
Transverse Sensitivity:	Less than 5% with Faraday Cage

Electrical

Output Current:	4-20 mA DC Proportional to RMS or Peak Acceleration
Supply Voltage:	15 to 30 VDC
Settling Time:	2 Second
Output Impedance:	Loop Resistance 600 Ohm Max @ 24 VDC
Case Isolation:	$>10^8$ Ohm at 500 Volt

Environmental

Operating Temperature Range:	-13 to +248°F (-25 to +120°C)
Sealing:	IP68
Maximum Shock:	5000 g

Mechanical

Case Material:	Stainless Steel
Sensing Element:	PZT/Compression Type
Mounting Torque:	5.9 ft. lbs (8 Nm)
Weight:	5.2 Oz (150 g)
Mounting:	1/4-28 UNF Mounting Stud and 1/4-28 to M8x1.25 Adapter Stud (Supplied with Sensor)
Mating Connector:	2 Pin MIL 5015 MS Connector

Intrinsically Safe Requirements

Certificate Details Group I+II

IEEx BAS08.0034X

Baseefa08ATEX0086X

ExII 1GD

Ex ia IIC T6 Ga

Ex ia IIIC T80°C IP65 Da

Ex I M1

Ex ia I Ma

(-40°C ≤ Ta ≤ +60°C)

Certificate Details Group II

ExII 1GD

Ex ia IIC T6 Ga

Ex ia IIIC T130°C IP65 Da

(-40°C ≤ Ta ≤ +110°C)

Accelerometer System Certificate

Baseefa08Y0087

Ex ia IIC T6 (-40°C ≤ Ta ≤ +60°C)

Terminal Parameters

Ui = 28V, Ii = 115mA, Pi = 0.65W Group II

Ui = 16.5V Pi = 0.65W

or Ui = 28V Ii = 115mA Pi = 0.65W Group I

Certified Temperature Range

Ex ia IIC T6 Ga (-40°C ≤ Ta ≤ +60°C) (Gas)

Ex ia IIC T4 Ga (-40°C ≤ Ta ≤ +120°C) (Gas)

Ex ia IIIC T80°C IP65 Da (-40°C ≤ Ta ≤ +60°C) (Dust)

Ex ia IIIC T130°C IP65 Da (-40°C ≤ Ta ≤ +110°C) (Dust)

Ex ia I Ma (-40°C ≤ Ta ≤ +60°C) (Mining)

South African Approval

Certificate No. MASC MS/16-0229X

Group I and II (As Baseefa/ATEX)

US/Canada Approvals

Certificate No. SGSNA/18/SUW/0000231

Class I, II, III, Division 1, 2, Groups A - G, T4, -40°C to +110°C

Class I, Zone 0, AEx, ia, IIC, T4, Ga, -40°C to +110°C

Zone 20, AEx, ia, IIIC, T130°C, IP65, Da, -40°C to +110°C


Barrier

1 x CMCP245-05 MTL Zener Barrier MTL7787+ For 4-20 mA Signals (BAS01ATEX7217)

1 x Pepperl+Fuchs Galvanic Isolator KFD2-STC4-Ex1, (BAS00ATEX7164)

or Pepperl+Fuchs Zener Barrier Z787 (BAS01ATEX7005) or any other barrier that conforms to system drawings

Dimensions

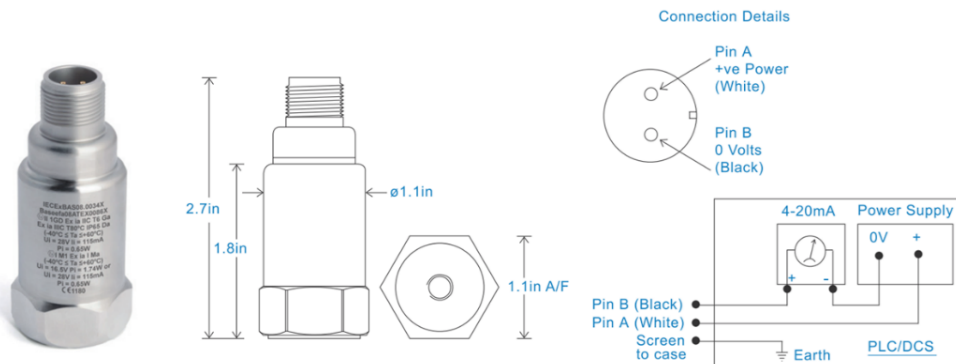

Ordering Information

CMCP422AT	-XX	-X	-X	/XX	Description
	-01				Loop Powered 4-20 mA Acceleration Sensor
	-02				1 g Full Scale
	-05				2 g Full Scale
	-10				5 g Full Scale
		-R			10 g Full Scale
		-P			RMS Detection
			-C		Peak Detection
				/IS	2 Pin MS 5015 Connector
					Intrinsically Safe

Example Part Number: CMCP422AT-05-R-C/IS Intrinsically Safe Loop Powered 4-20 mA Acceleration Sensor, Top Exit, Full Scale 5 g, RMS Detection and 2 Pin MS 5015 Connector

Note: Due to STI's continuous process improvement, specifications are subject to change without notice.