



## CMCP422VTS-C Series Loop Powered 4-20mA Velocity Sensor, Side Exit 2 Pin MS 5015



### Features:

- Loop Powered 4-20mA Output
- Velocity RMS or Peak
- Side Exit 2 Pin MS 5015 Connector
- Low Profile
- Interfaces Directly to PLC/DCS System
- Two Different Ranges Available
- 10Hz to 1kHz ISO Filtering (600 CPM to 60k CPM)
- -13 to 194°F (-25 to 90°C) Temperature Range
- Sealed to IP68



### Typical Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, HVAC, Spindles, Machine Tooling, Process Equipment and many more.

### Technical Performance

Mounted Base Resonance: 5 kHz Min.  
 Ranges: See Ordering Information Below  
 Frequency Response: 10 Hz to 1 kHz ± 5%  
 600 CPM to 60k CPM  
 ISO 10816  
 Isolation: Base Isolated  
 Measurement Range: 50g peak  
 Transverse Sensitivity: Less than 5% with Faraday Cage

### Electrical

Output Current: 4-20mA DC Proportional to RMS or Peak Velocity  
 Supply Voltage: 15 to 30 VDC  
 Settling Time: 2 Seconds  
 Output Impedance: Loop Resistance 600 Ohms Max @ 24VDC  
 Case Isolation: >10<sup>8</sup> Ohms at 500 Volts


### Environmental

Operating Temperature Range: -13 to 194°F (25 to 90°C)  
 Sealing: IP68  
 Maximum Shock: 5000 g


### Mechanical

Case Material: Stainless Steel  
 Sensing Element: PZT/Compression Type  
 Mounting Torque: 5.9 ft. lbs (8Nm)  
 Weight: 6.5 Oz (185g)  
 Mounting: 1/4"-28 Captive Bolt (Supplied with Sensor)  
 Mating Connector: 2 Pin MIL 5015 MS Connector

## Dimensions

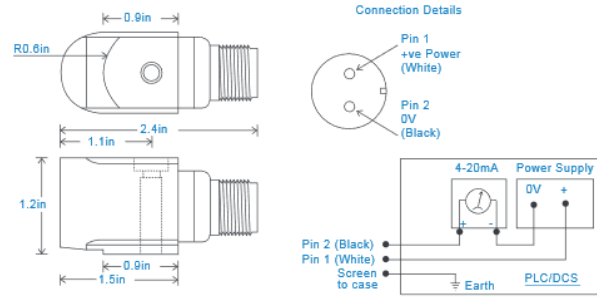

## Typical Frequency Response

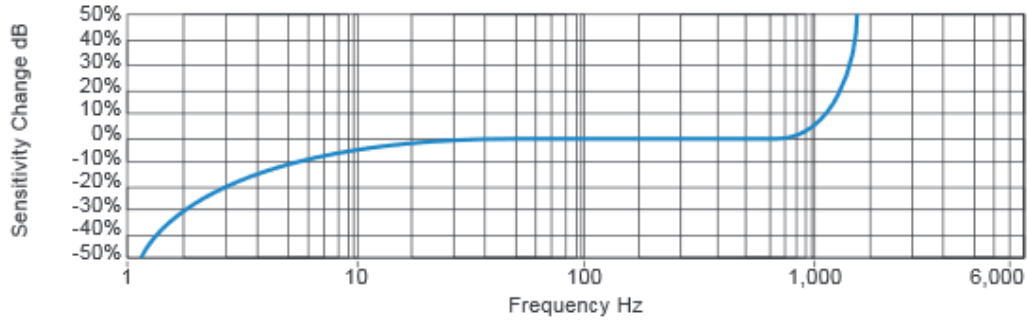

## Ordering Information:

CMCP422VTS	-XX	-X	-XXX	Description
	-01			1.00 In/Sec Full Scale (25.4mm/Sec)
	-02			2.00 In/Sec Full Scale (50.8mm/Sec)
		-R		RMS Detection
		-P		Peak Detection
			-C	<b>2 Pin MS 5015 Connector</b>
			-M12	M12 Eurofast Connector
			-I	Integral Braided Armor Cable (5 meters)

## Similar Products:



**CMCP422VTS-XX-X-I**  
Integral Armored Cable



**CMCP422VTS-XX-X-M12**  
M12 Eurofast Connector