Cable Construction (2 Core FEP)

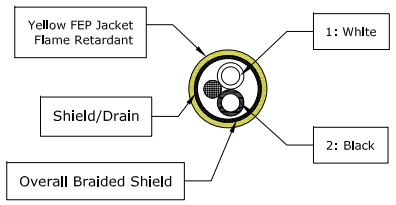

Isolated Shielding (-I Option)

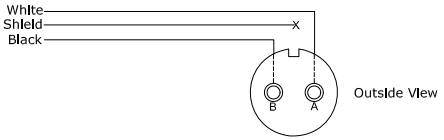

Non-Isolated Shielding (-NI Option)

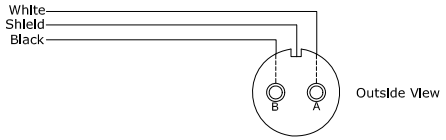

Maximum Cable Bend Radius



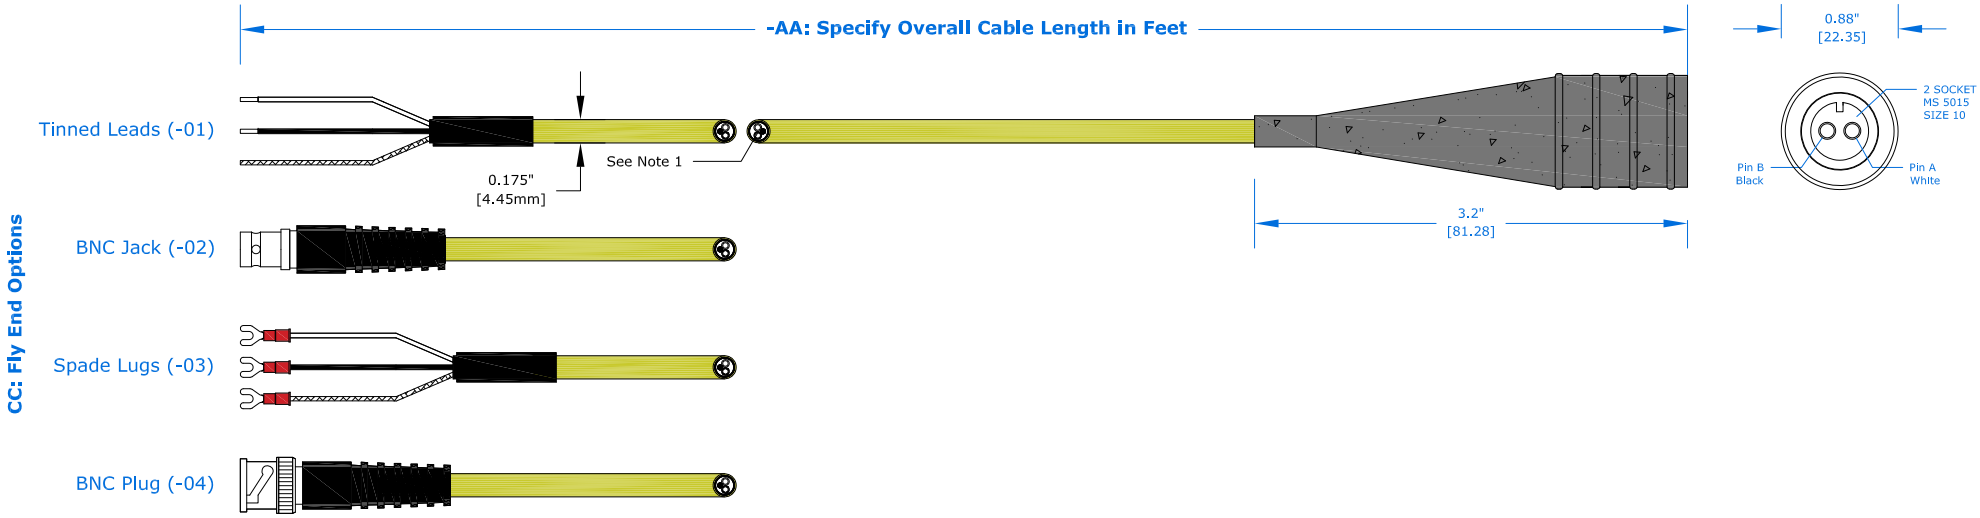

CMCP602HST-AA-BB-CC-DD

AA: Overall Cable Length (Specify Length in Feet)
-16: 16' (5m)
-32: 32' (10m)
-64: 64' (20m)
-XXX: Specify Length in Feet

BB: Cable Type
-01: Standard Cable, No Armor

CC: Fly End Connection
-01: Tinned Leads (Bare Wire)
-02: BNC Jack (Female)
-03: Spade Lugs
-04: BNC Plug (Male)

DD: Specify Cable Shielding
Leave Blank for Isolated
Add -NI for Non-Isolated

Wire Color Code	
ID #	Color
1	White
2	Black
3	Red
4	Blue
5	Yellow
6	Orange
7	Grey
8	Purple
9	Green
10	Pink
11	Green/Yellow
12	White/Red
13	White/Yellow
14	White/Green

Notes:
1.
2.
3.
4.
5.

THIS DOCUMENT IS PROPERTY OF STI AND CANNOT BE UNDER ANY CIRCUMSTANCES COPIED OR USED FOR ANY UNAUTHORIZED PURPOSE WITHOUT WRITTEN CONSENT FROM STI. THIS DOCUMENT CANNOT BE TRANSFERRED TO ANY THIRD PARTY WITHOUT APPROVAL FROM STI.

REV.	DATE	DRAWN	DESCRIPTION
A	April 15, 2021	MDH	Original Drawing

CUSTOMER	
LOCATION	
ORDER NO.	
SR. NO	

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES.

TOLERANCES:
FRACTIONS ± 1/64
DECIMALS .XX ± 0.01, .XXX ± 0.005, .XXXX ± 0.0005
ANGLES ± 1.0

DRAWN	M. Howard	April 15, 2021
CHECK	M. Howard	April 15, 2021
ENG.	M. Howard	April 15, 2021
MFG.		
APPR.	M. Howard	April 15, 2021

STI Vibration Monitoring
League City, Texas

CMCP602HST
TPE Teflon Jacketed Cable, 2 Socket MS 5015

SIZE	DWG. NO.	REV.
A	CMCP602HST	A

Scale: 1:1 | Sheet: 1 of 1