



CC: Fly End Options

- Trimmed Leads (-01)
- Spade Lugs (-03)

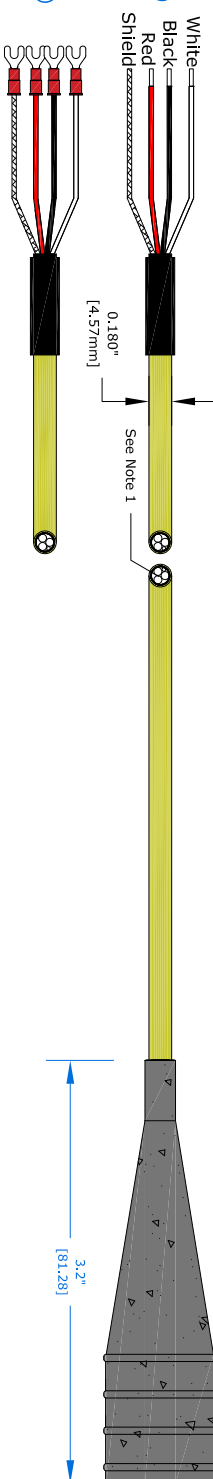

-AA: Specify Overall Cable Length in Feet

CMCP603HST-AA-BB-CC-DD

AA: Overall Cable Length (Specify Length in Feet)

- 01: 18" (457mm)
- 02: 36" (914mm)
- 03: 54" (1371mm)
- 04: 64" (1626mm)
- XXX: Specify Length in Feet

BB: Cable Type

- 01: Standard Cable, No Armor
- CC: Fly End Connection
- 01: Trimmed Leads (Bare Wire)
- 02: Spade Lugs

DD: Specify Cable Shielding

- Leave Blank for Isolated
- Add -N1 for Non-Isolated

Wire Color Code	Wire Color
1	White
2	Black
3	Red
4	Yellow
5	Green

REV	DATE	BY	DESCRIPTION
1	APRIL 15, 2021	MSH	Original Drawing
2			
3			
4			
5			

<p>THIS DRAWING IS THE PROPERTY OF STI AND SHALL BE RETURNED TO STI IMMEDIATELY UPON REQUEST. IT IS TO BE USED FOR THE PROJECT AND NOT BE REPRODUCED OR COPIED FOR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF STI. THIS DOCUMENT CANNOT BE REPRODUCED OR COPIED FOR ANY OTHER PROJECT WITHOUT APPROVAL FROM STI.</p>	
CUSTOMER	STI
LOCATION	League City, Texas
ORDER NO.	CMCP603HST
SERIAL NO.	
UNLESS OTHERWISE SPECIFIED	ALL DIMENSIONS ARE IN INCHES.
TOLERANCES:	DECIMALS: ± 0.01
FRACTIONS:	XX ± 0.01
ANGLES:	± 1.0
SCALE:	1:1
DRAWN:	M. Howard
CHECK:	M. Howard
DATE:	APRIL 15, 2021
REV:	A
DATE:	APRIL 15, 2021
<p>STI Vibration Monitoring League City, Texas</p>	
<p>CMCP603HST TPE Traction Jacketed Cable, 3 Socket MS 5015</p>	
<p>Scale: 1:1</p>	
<p>Sheet: 1 of 1</p>	