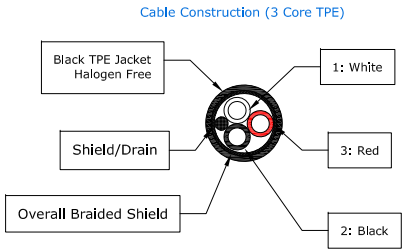

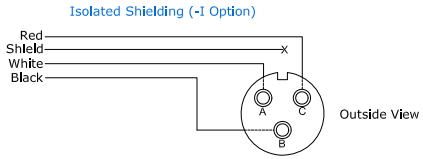

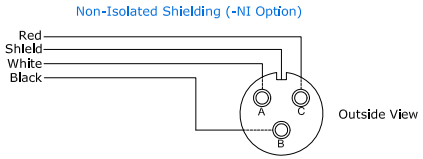



CMCP603LST-AA-BB-CC-DD

AA: Overall Cable Length (Specify Length in Feet)
- -16: 16' (5m)
- -32: 32' (10m)
- -64: 64' (20m)
- -XXX: Specify Length in Feet

BB: Cable Type
- -01: Standard Cable, No Armor
- -03: With Stainless Steel Braided Armor

CC: Fly End Connection
- -01: Tinned Leads (Bare Wire)
- -03: Spade Lugs

DD: Specify Cable Shielding
Leave Blank for Isolated
Add -NI for Non-Isolated

Wire Color Code	
ID#	Color
1	White
2	Black
3	Red
4	Blue
5	Yellow
6	Orange
7	Grey
8	Purple
9	Green
10	Pink
11	Green/Yellow
12	White/Red
13	White/Yellow
14	White/Green

Notes:
1.
2.
3.
4.
5.

THIS DOCUMENT IS PROPERTY OF STI AND CANNOT BE UNDER ANY CIRCUMSTANCES COPIED OR USED FOR ANY UNAUTHORIZED PURPOSE WITHOUT WRITTEN CONSENT FROM STI. THIS DOCUMENT CANNOT BE TRANSFERRED TO ANY THIRD PARTY WITHOUT APPROVAL FROM STI.

REV.	DATE	DRAWN	DESCRIPTION
A	April 15, 2021	MDH	Original Drawing

CUSTOMER
LOCATION
ORDER NO.
SR. NO

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES.

TOLERANCES:
FRACTIONS ± 1/64
DECIMALS .XX ± 0.01 .XXX ± 0.005 .XXXX ± 0.0005
ANGLES ± 1.0

DRAWN	M. Howard	April 15, 2021
CHECK	M. Howard	April 15, 2021
ENG.	M. Howard	April 15, 2021
MFG.		
APPR.	M. Howard	April 15, 2021

STI Vibration Monitoring
League City, Texas

CMCP603HST
TPE Teflon Jacketed Cable, 3 Socket MS 5015

SIZE A | DWG. NO. CMCP603HST | REV. A

Scale: 1:1 | Sheet: 1 of 1